


## Model:TRP215518

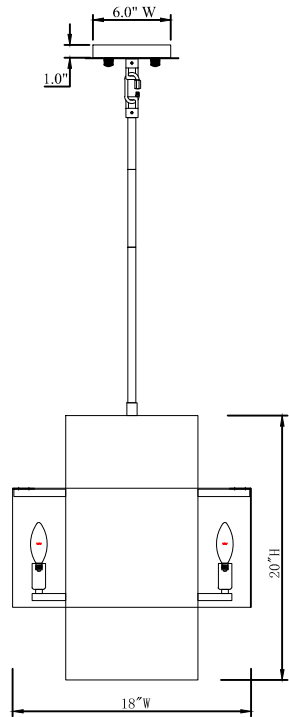

Parts package		
Item	Name	Qty
	Mounting screw	2
	Wire connector	3
	Mounting strap	1
	Ground screw	1
	Paddle screw	2
	Explosive screws	4
	Chain link	1
	Square rings	2
	Canopy	1
	Round iron pieces	1
	Thread cap	2
	Rifled tube	5

**Tools required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (5) Candle Base-60W, not included.

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### Warnings and Cautions

**Please Note :** Due to the weight of this fixture, it must be mounted independently from the junction box. Additional means of support is required.

Have your fixture installed by a qualified, licensed electrician.



Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.



TRUE LIGHT CO.

## Installation

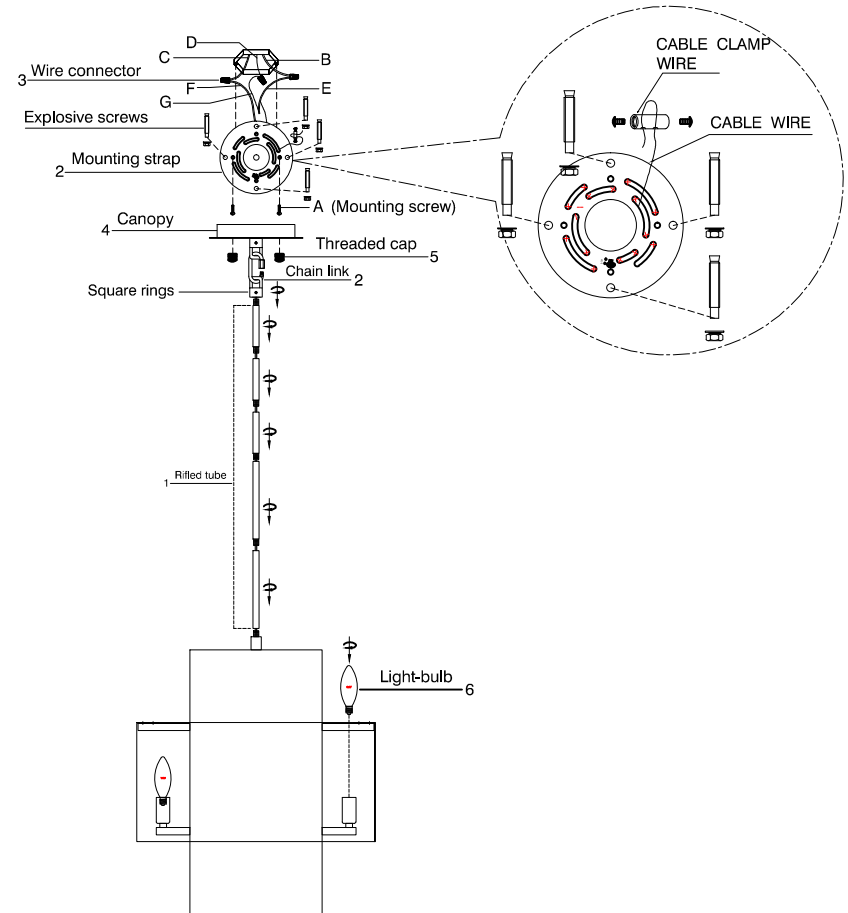

A-Mounting screws x 2(provided)  
 B-Black wire (L) from junction box  
 C-White wire (N) from junction box  
 D-Green wire/bare copper (G) from junction box  
 E-Black wire from fixture  
 F-White wire from fixture  
 G-Bare wire from fixture

### Installation Instructions:

1. Measure the lamp height and select the desired numbers of rifled tubes, insert the electrical wires through the tubes and canopy, connect the upper tube to the articulation and the lower tube to the socket.
2. Mount the mounting strap to the junction box using the provided mounting screws.
3. Connect the house electrical wires to the fixture wires using the provided wire connectors. Refer to the wiring chart and instructions.
4. Mount the canopy to the ceiling by inserting the bolts of the mounting plate through the holes of the canopy, tighten with the threaded caps.
5. Install the threaded cap.
6. Install the light bulb.